


INSTALLATION GUIDE

Baffle Beam

Baffle is vertically installed unframed units. It is available in different sizes and a wide range of colors. Two hanging methods: free hanging of each of the baffles or using a connector profile that maintains a uniform hanging.




Customized sizes are available.



DIMENSIONS

278 cm	1
	10 cm
	16 cm
	26 cm
	56 cm

ISOMETRY

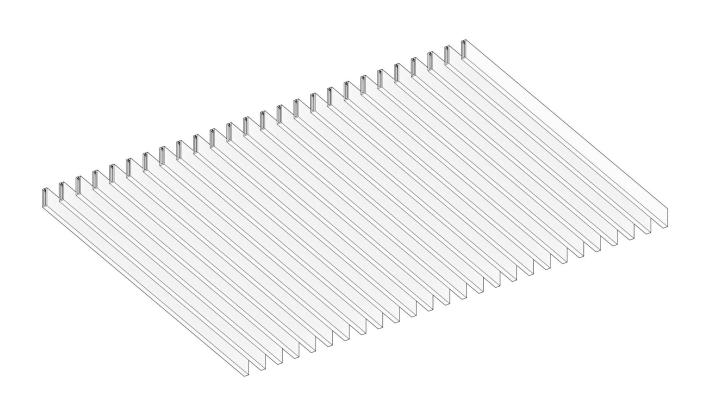





INSTRACTIONS

These are your parts.

TYPE B (Uniformed Hanging)

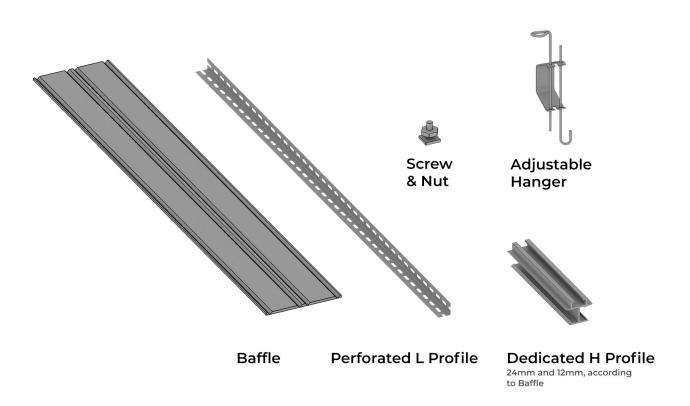


TYPE A (Free Hanging)

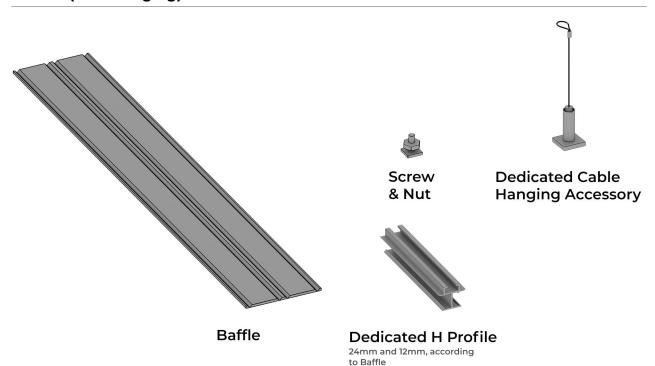



TYPE A (Uniformed Hanging)


• Mark the ceiling line on the above ceiling. Keep a gap of 80-120 cm between hanging rows.

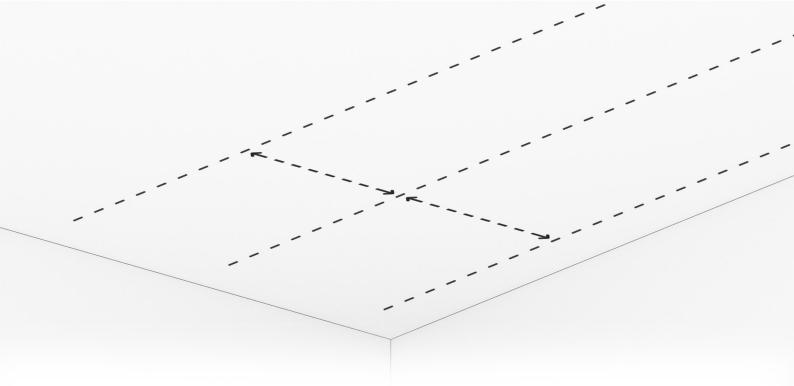


② Install the adjustable hangers accordingly.




3 Connect the Perforated L Profiles to the Adjustable Hangers.

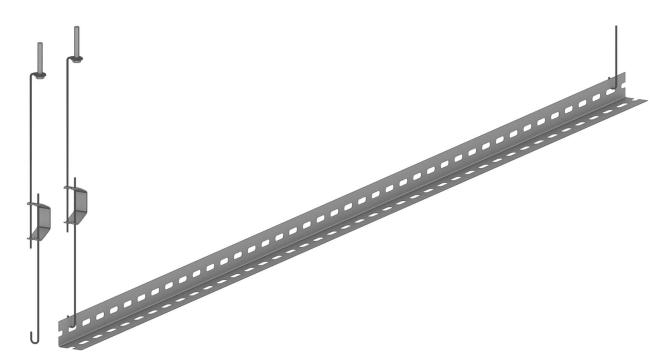


Fold the Baffle Beam in according to the slots

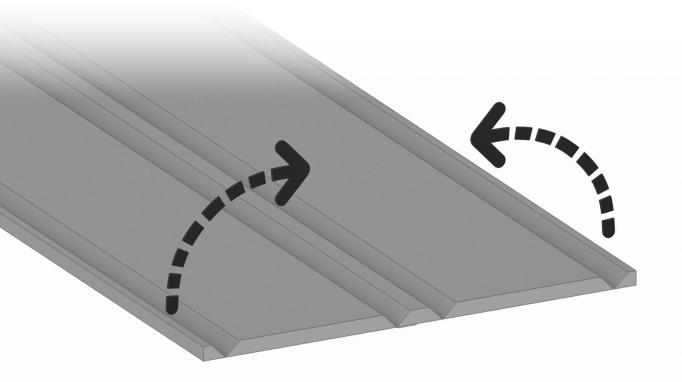

Insert one edge of the baffle into one of the H profile slots.

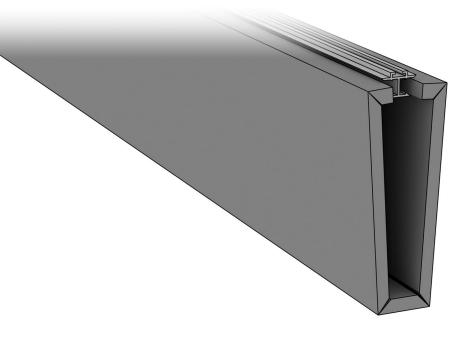


© Close the other edge into the second slot. Make sure to mail it all the way down.

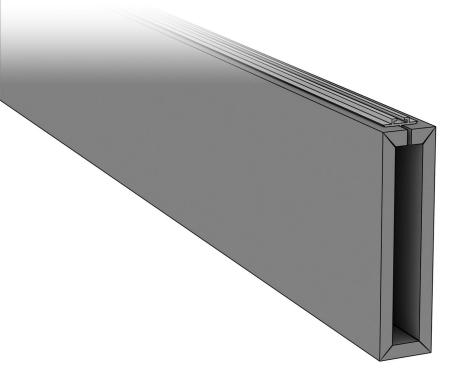


choshape

slide the screw into the H profile facing up

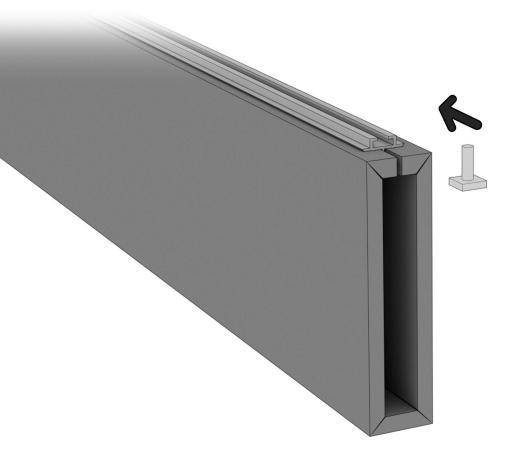


® Tighten the nut to the screw.

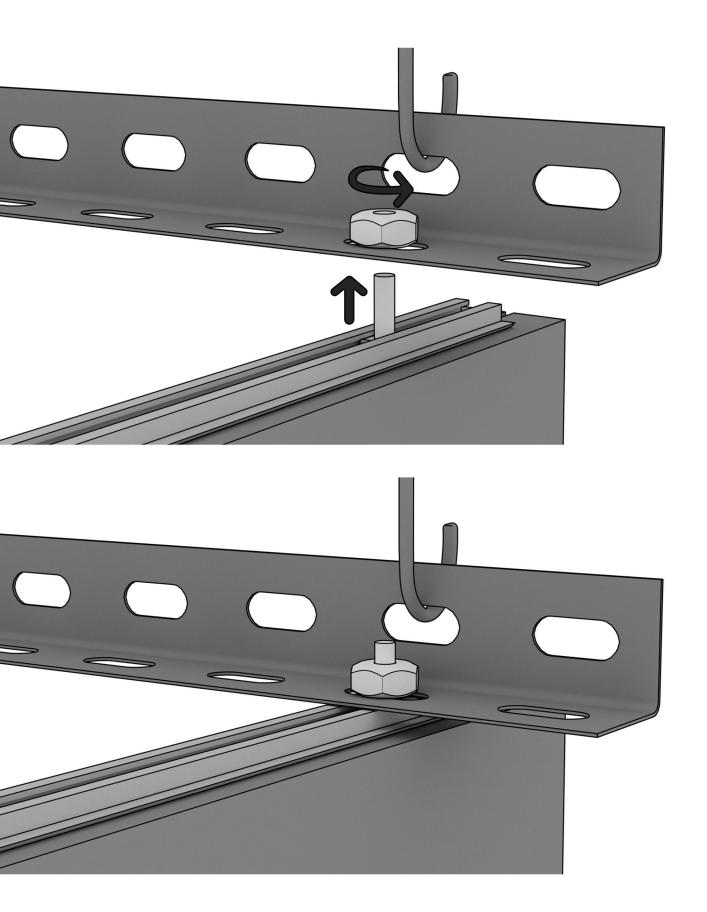




When two Baffles aligned - make sure to connect them with a H Profile.

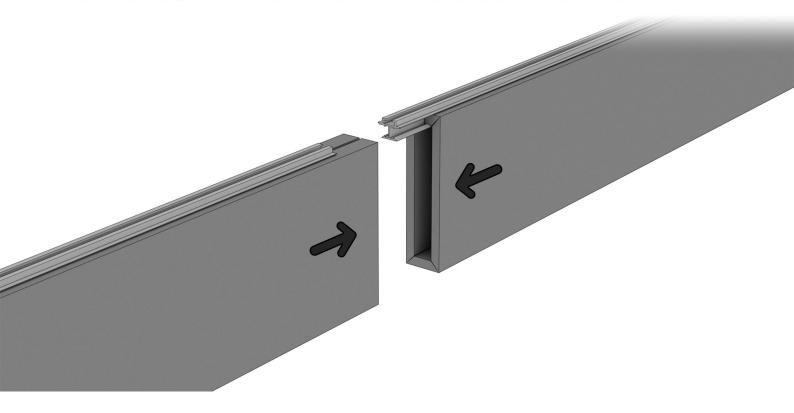


Repeat the process for the entire ceiling.

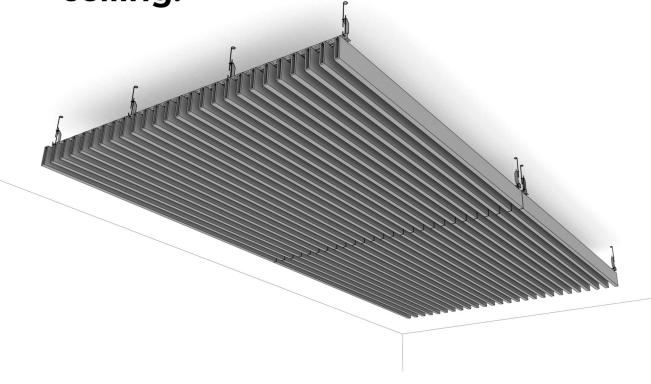



TYPE B (Free Hanging)

• Mark the ceiling line on the above ceiling. Keep a gap of 80-120 cm between hanging rows.

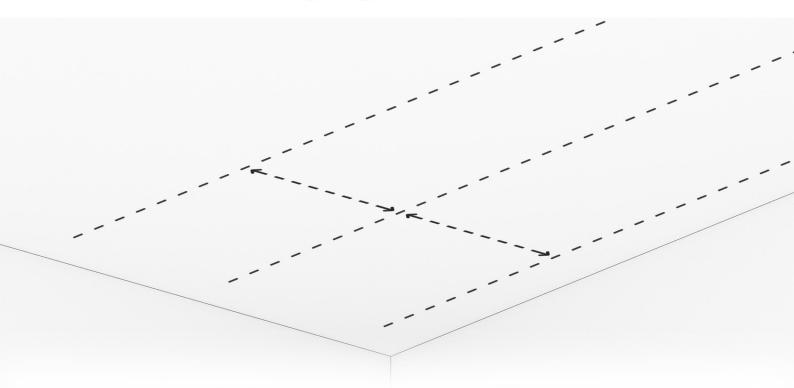


② Install the adjustable hangers accordingly.




choshape


3 Keep the gap at a consistent distance.

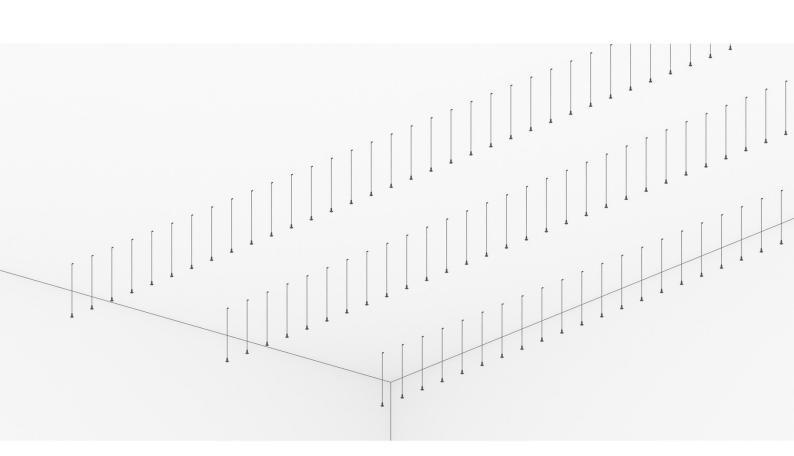


Fold the Baffle Beam in according to the slots

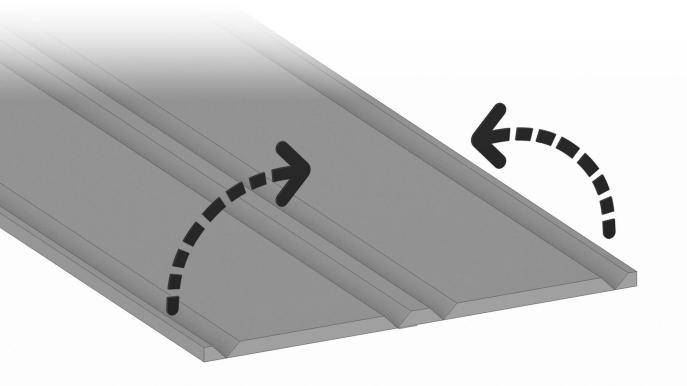


Insert the H Profile into the Baffles. Make sure to do so all the way down.

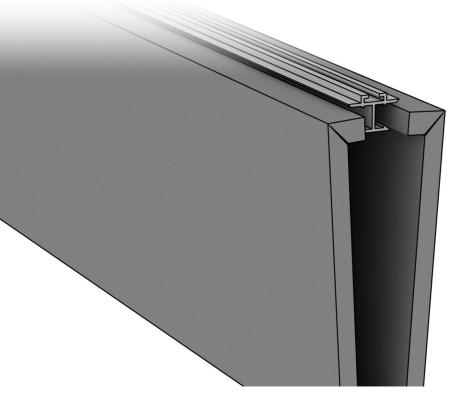


© Close the H Profile into the Baffles. Make sure to do so all the way down.

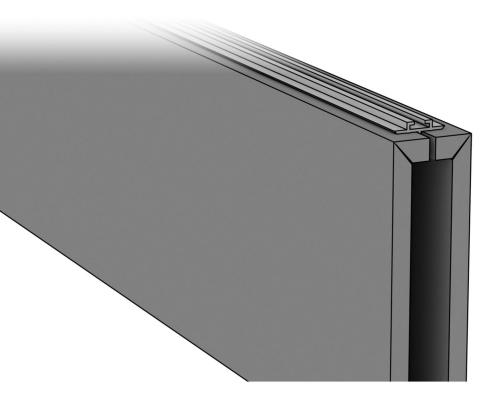


Thread the dedicated cable hanging accessory into the U Profile.

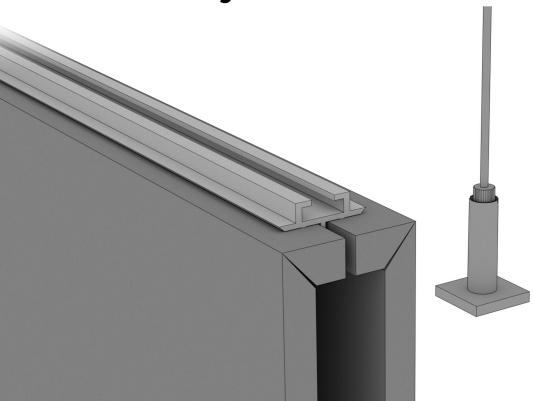

• Make sure it is properly tightened.

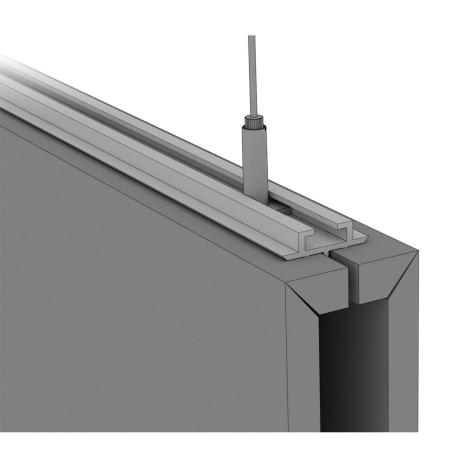

When two Baffles aligned - make sure to connect them with an H Profile.

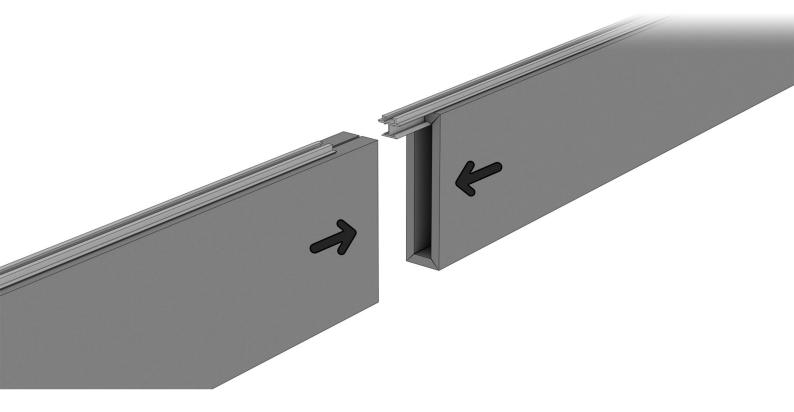

Repeat the process for the entire ceiling.

